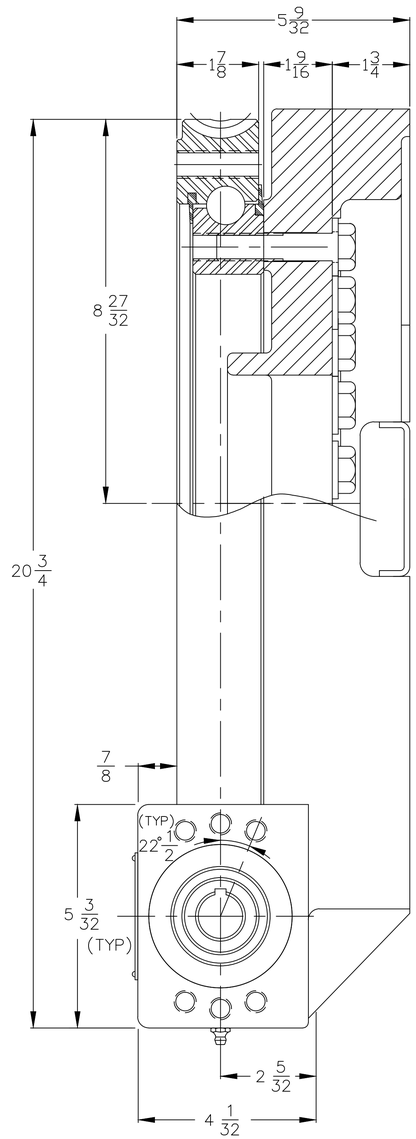

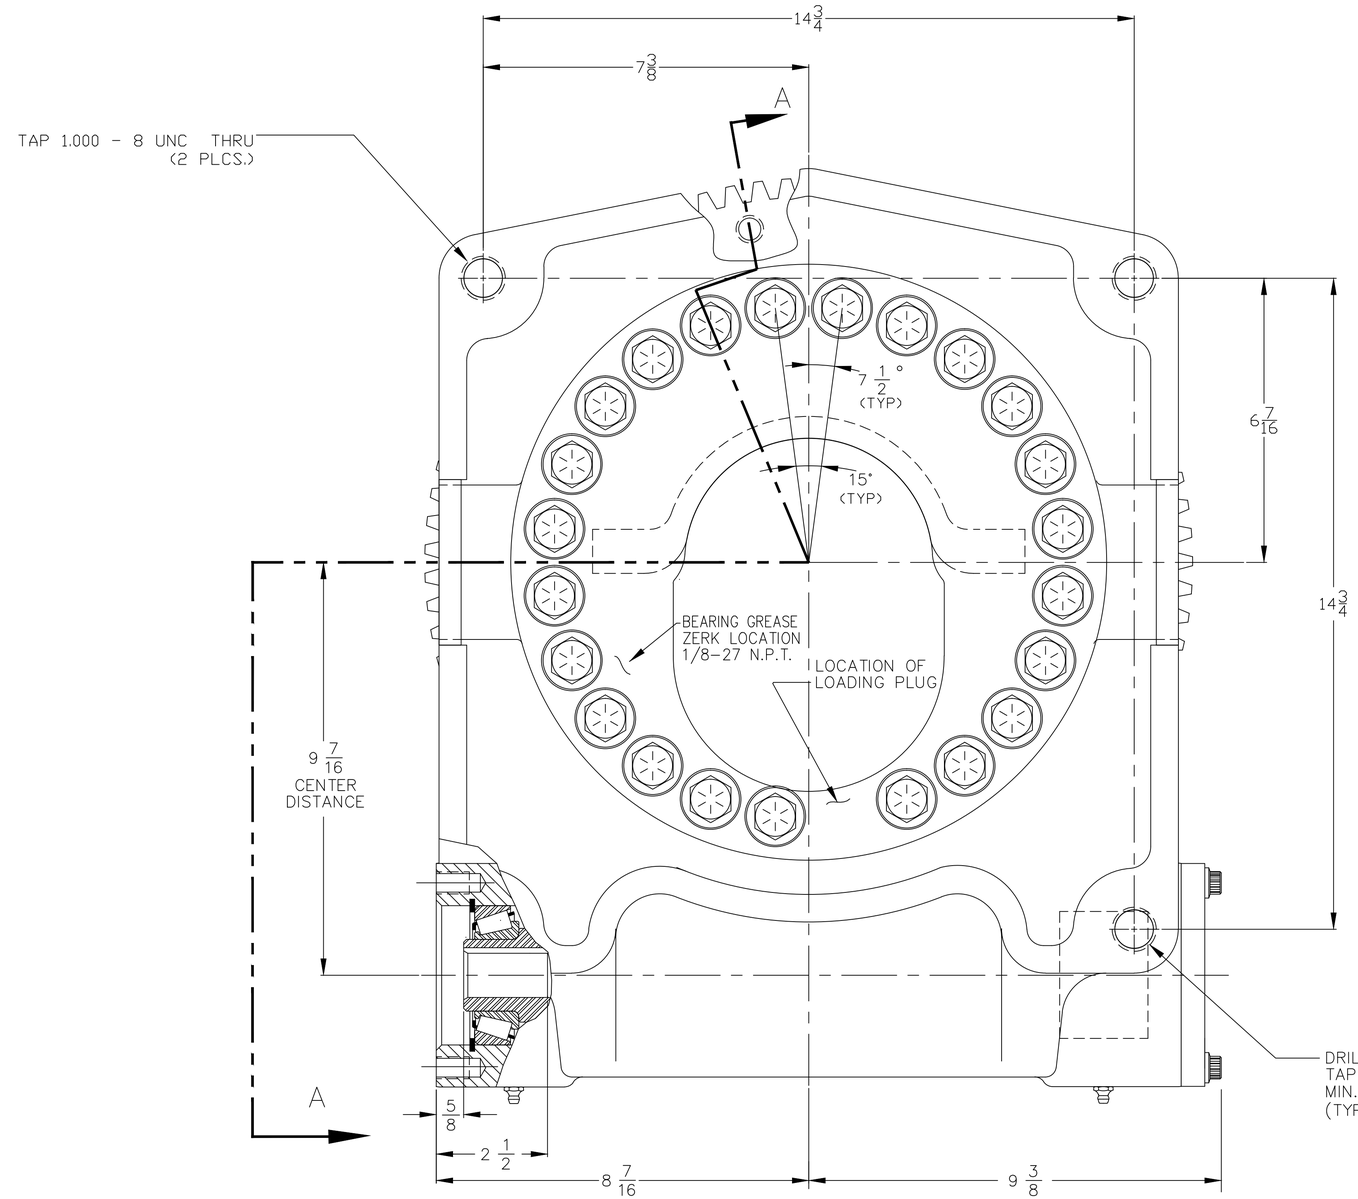

INNER RACE
(23) HOLES SPACED AS SHOWN,
TAP 5/8-11 N.C. THRU
ON A 11.614 BOLT CIRCLE DIA.

OUTER RACE
(19) HOLES SPACED AS SHOWN,
TAP 5/8-11 N.C. THRU
ON A 15.354 BOLT CIRCLE DIA.

ENGINEERING DATA
85:1 RATIO
53% THEORETICAL DYNAMIC EFFICIENCY
49% THEORETICAL STATIC EFFICIENCY
56,700 IN. LBS. TORQUE RATING



MOTOR MOUNT
SAE "A" (2) OR (4) BOLT MAGNETO MOUNT
(6) HOLES ON 4 3/16 BOLT CIRCLE DIA.
TAP 1/2-13 N.C. X 29/32 DP.
3.253/3.251 PILOT DIA.

MOTOR INPUT
1" DIA. WITH 1/4" KEY